

3xSD | Üç pompalı paket hidroforlar three pump booster sets

130



TANIM / Definition

Üç pompalı paket hidroforlar ortak bir kaide üzerine montajı yapılan her pompanın emme hattında vana basma hattında çekvalf, basınç şalteri, manometre bulunan hidroforlardır. Hidroforlarda kullanılan elektrik kumanda panosunda faz hatası, faz sırası kontrolü ve susuz çalışmaya karşı 5 m seviye flatörü standarttır. Hidrofor panolarında sıra değiştirme, rotasyon özelliği bulunmaktadır.

Three pump package boosters; installed on base, with check valve on pumping port, pressure gauges and manometers. In the electrical control panel used in the boosters, level switch with 5 m cable against phase error; phase sequence control and waterless operation are included in the standard delivery. Boosters panels have the ability to change sequence and rotation.

KULLANIM YERLERİ / Main applications

Kullanım suyu	Domestic water
Bahçe sulama	Garden watering
Proses suyu	Process water

TEKNİK ÖZELLİKLER / Technical information

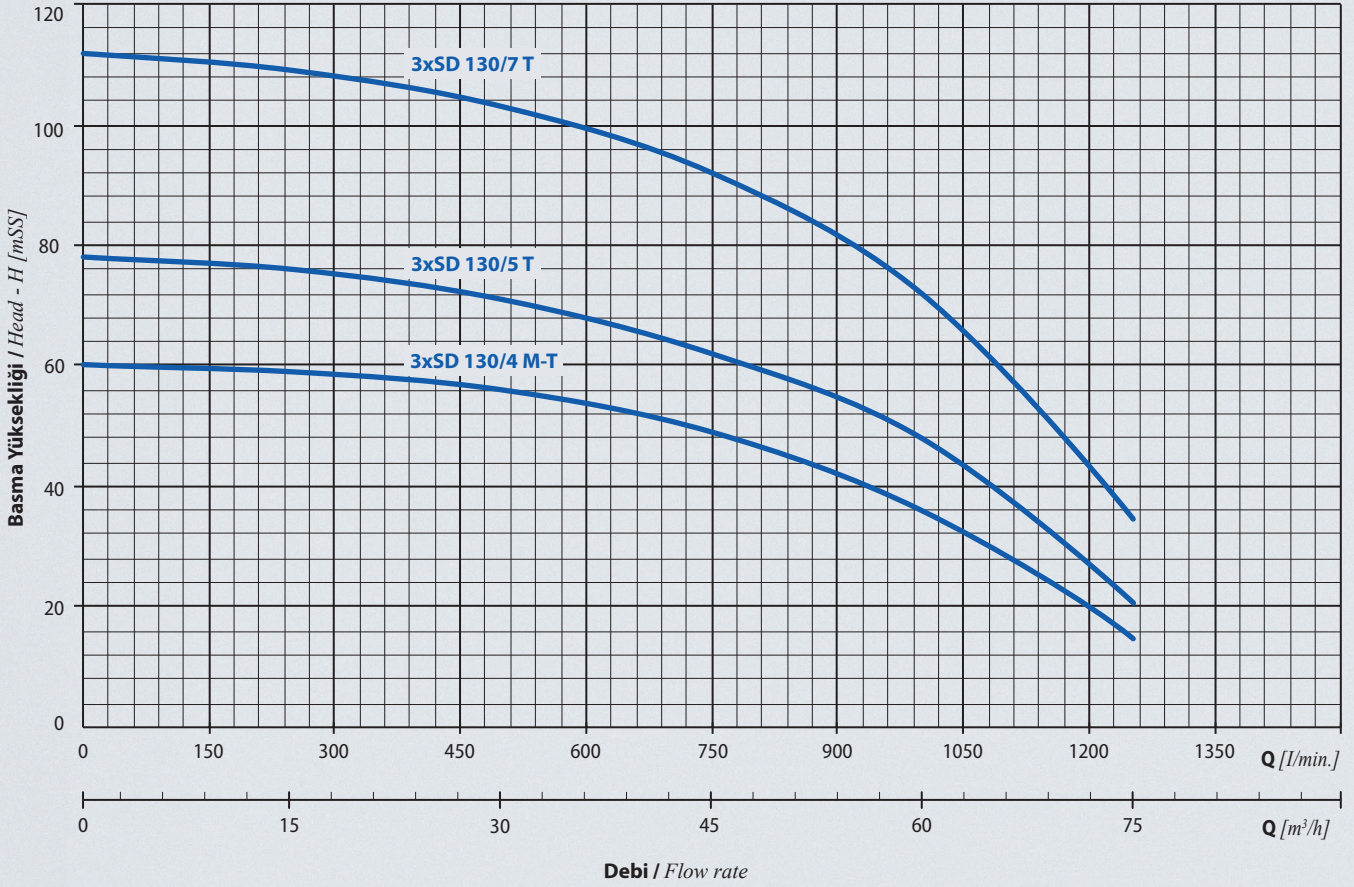
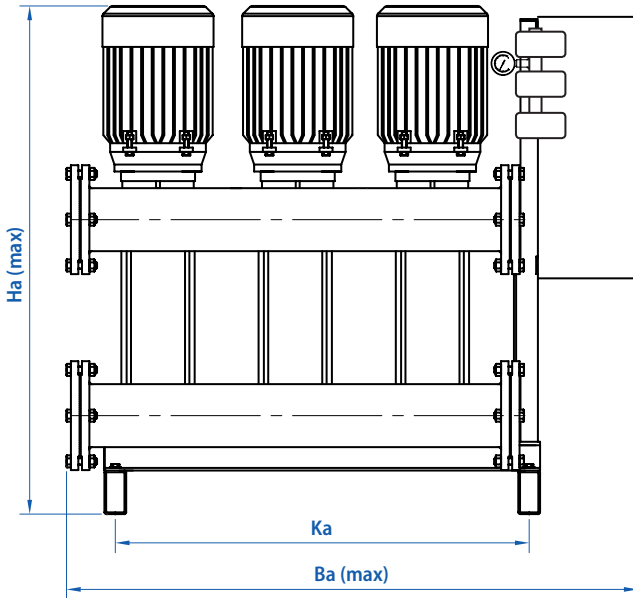
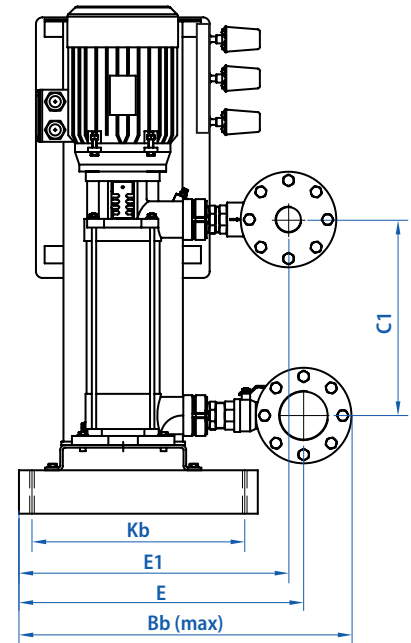
Emme ağız çapı / Suction nozzle	: 3"
Basma ağız çapı / Discharge nozzle	: 3"
Debi / Flow rate [max.]	: 75 m ³ /h
Basma yüksekliği / Head [max.]	: 112 mSS
Motor devri / Speed [max.]	: 2900 d/d
Akışkan sıcaklığı / Fluid temperature [max.]	: 60 °C
Çalışma gerilimi / Operating voltage	: 380V, 50 Hz

MALZEME ÖZELLİKLERİ / Material properties

Emme-Basma Gövdesi / Suction-discharge casing	Dış gömlek / Outer case	Motor Gövdesi / Motor casing	Çark / Impeller	Difüzör / Diffuser	Pompa Mili / Shaft	Mekanik Salmastra / Mechanical seal
Pik döküm / Cast Iron	AISI 304 L	Alüminyum / Aluminum	Noryl / 30% glass fiber reinforced Noryl	Noryl / 30% glass fiber reinforced Noryl	AISI 304	Karbon - Seramik / Carbon - Ceramic

PERFORMANS TABLOSU / Performance Table

Hidrofor Tipi / Booster Type	Motor Gücü / Power		Q	Hm (mSS)					
	kW	HP		m ³ /h	L/dak	0	15	30	45
3xSD 130/4 T	3x4	3x5,5	60	59	56	49	36	15	
3xSD 130/5 T	3x5,5	3x7,5	78	76	71	62	48	21	
3xSD 130/7 T	3x7,5	3x10	112	109	103	92	72	35	


BOYUTLAR / Dimensions

3xSD üç pompalı paket hidroforlar
three pump booster sets


Hidrofor Tipi / Booster Type	Bağlantı Çapı / Connection		Boyutlar / Dimensions [mm]								Ağırlık Weight [kg]
	Giriş / Suction	Çıkış / Discharge	K_b	K_a	E_1	E	B_a [max.]	B_b [max.]	H_a [max.]	C_1	
3xSD 130/4 T	3"	3"	490	950	660	693	1312	803	1044	328	234
3xSD 130/5 T	3"	3"	490	950	660	693	1312	803	1093	377	292
3xSD 130/7 T	3"	3"	490	950	660	693	1312	803	1188	472	408